

## Multimode Cable Assemblies




### SPECIFICATIONS

**Operating Temperature:** -40° C to +85° C  
**Connector Loss:** 0.3dB Maximum

### FEATURES

- Utilise high quality connectors
- 100% optically tested for insertion loss. They are individually packaged and labeled
- Custom engineered cable assemblies are available

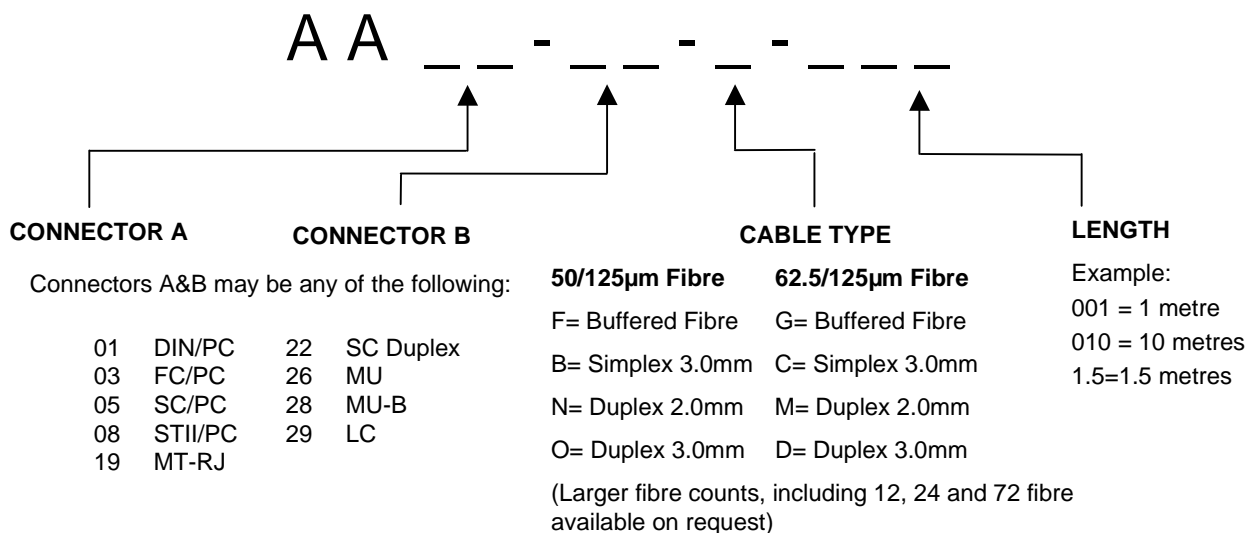

### EXAMPLE

#### AA05-05-D-001

Multimode 62.5/125µm duplex (2 x 3.0mm) cable with SC/PC connectors at each end.

#### AA03-08-B-005

Multimode 50/125µm simplex 3.0mm cable with FC/PC terminated at one end and ST terminated at the other end.

**Customised options are also available including devices, breakout kits, packaging and labeling. Please don't hesitate to contact us to discuss your requirements.**