



DM Dura|Mate™ Family



Environmentally-Sealed, Multi-Pin, Heavy-Duty, Plastic or Metal Circular Connectors

Amphenol Sine Systems' **DuraMate™ Family** of environmentally-sealed, multi-pin, heavy duty, plastic (AHDP) or metal (AHDM/AHDBM) circular connectors provide an economical, quick-connect, bayonet-locking system manufactured to withstand the challenges and complexities of harsh environment, off-road applications. Our ISOBUS products specifically meet ISO 11783 standards (for control and communications between tractors, implements and software) for agricultural applications.

Currently available in the following Series:

DM Dura|Mate™ AHDP **DM Dura|Mate™ AHDM**

DM Dura|Mate™ AHDP ISOBUS 91 Series **DM Dura|Mate™ AHDM/AHDBM ISOBUS 91 Series**

DuraMate™ AHDP (Pgs 3-7): Size 18 with 8 insert arrangements 2, 6, 8, 14(x3), 20 and 21

Size 24 with 13 insert arrangements 7(x2), 9, 16, 18, 19, 21, 23, 27, 29, 31, 35 and 47

DuraMate™ AHDM (Pgs 8-11): Size 18 with 6 insert arrangements 2, 6, 8, 14, 20 and 21

Size 24 with 13 insert arrangements 7(x2), 9, 16, 18, 19, 21, 23, 27, 29, 31, 35 and 47

DuraMate™ AHDP ISOBUS 91 (Pgs 12-16): Size 24, 9 Position

DuraMate™ AHDM/AHDBM ISOBUS 91 (Pgs 17-22): Size 24, 9 Position

Key Features

- 3 key-way bayonet design ensures proper mating of connectors
- High density signal and mixed power insert configurations
- Operating temperature range: -55°C to +125°C
- High current configurations incorporating revolutionary RADSOK® contacts
- High strength impact resistant & lightweight thermoplastic or zinc-alloy metal housings
- Low insertion force stamped terminals offer improved manufacturing efficiencies
- Environmentally-sealed and engineered rapid and secure mating system achieves IP68/IP69K protection (in mated condition) from ingress of dust, water, mud and other contaminants and is vibration resistant
- Sealing features consisting of durable high temperature silicone provide barrier from lubricating oils, hydraulic fluids and fossil fuels
- Backshells maintain a compression-fit design to resist maximum pull-out forces and facilitate strain-relief for jacketed cable ranges
- Wire entry sealing available in three separate ranges for discrete wire applications
- Wide Thread Adapters (WTA) provide an enhanced threading for use with our wide variety of screw-on or clamshell backshells (AHDP Only)
- Smooth Ring Adapters (SRA) are designed for use without backshells for a smaller footprint (AHDP Only)
- Backshell Ring Adapters (BRA) allow for use with other compatible industry-standard snap-on backshells (AHDP Only)
- Utilizes A Series™ standard contact system (Stamped & Formed or Machined)




A A Series™ Family



Standard products. Custom solutions

DuraMate™ AHDM/AHDP Series - Part Numbering Sequence

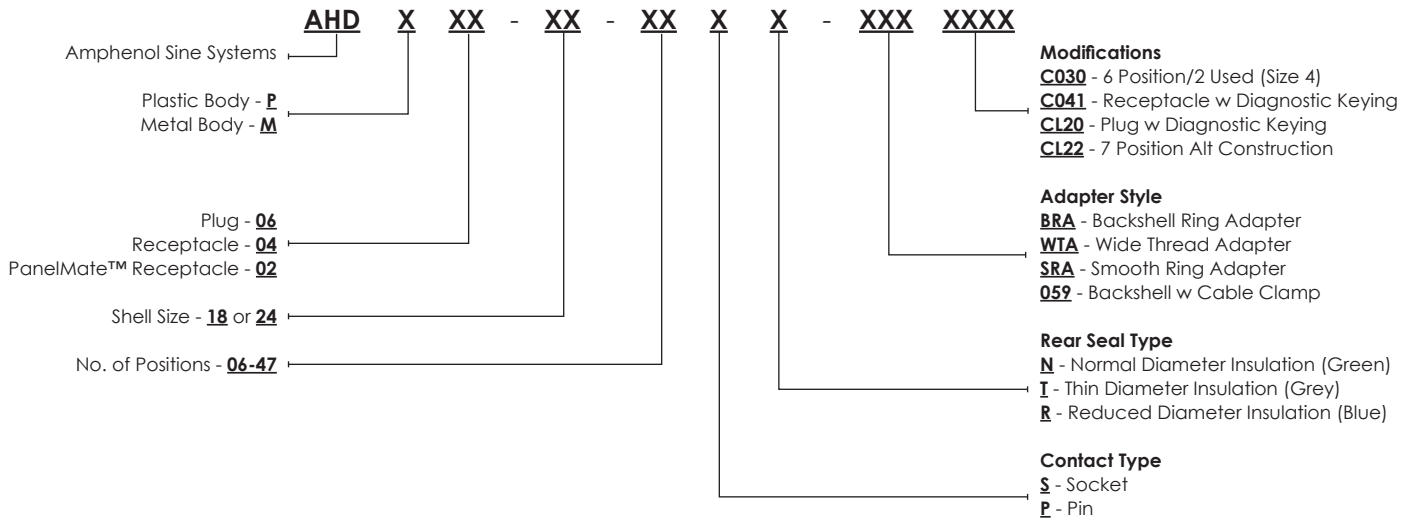

DuraMate™ AHDP/AHDM Series - Sample Layouts



AHDP06-18-20SN-SRA
Size 18, 20 Pos, Plug, Socket, DuraMate™ AHDP Series, Plastic, Normal Seal, Smooth Ring Adapter



AHDP02-18-08PR-WTA
Size 18, 8 Pos, Receptacle with Flange, Pin, DuraMate™ AHDP with PanelMate™, Plastic, Reduced Seal, Wide Thread Adapter



AHDP04-18-06PN-BRA
Size 18, 6 Position, Receptacle, Pin, DuraMate™ AHDP, Plastic, Normal Seal, Backshell Ring Adapter (BRA) (Green)



AHDM04-18-08SN
Size 18, 8 Pos, Receptacle, Socket, DuraMate™ AHDM Series, Metal Body, Normal Seal, Wide Thread Adapter



AHDM06-24-16PR
Size 18, 16 Pos, Plug, Pin, DuraMate™ AHDM Series, Metal Body, Reduced Seal, Wide Thread Adapter



AHDM06-18-14SR-059
Size 18, 14 Pos, Plug, Socket, DuraMate™ AHDM Series, Metal Body, Reduced Seal, Backshell with Cable Clamp





DM DuraMate™ AHDP

Environmentally-Sealed, Multi-Pin, Heavy-Duty, Plastic, Circular Connectors

Available in Size 18 with 8 insert arrangements 2, 6, 8, 14(x3), 20 and 21
Available in Size 24 with 13 insert arrangements 7(x2), 9, 16, 18, 19, 21, 23, 27, 29, 31, 35 and 47

The **DuraMate™ AHDP** environmentally-sealed, multi-pin, heavy duty, plastic, circular connector series provides an economical quick-connect bayonet locking system manufactured to withstand the challenges and complexities of harsh environment off-road applications.

- 3 keyway bayonet design ensures proper mating of connectors
- High density signal and mixed power insert configurations
- High current configurations incorporating revolutionary RADSOK® contacts
- Low insertion force stamped terminals offer improved manufacturing efficiencies
- Sealing features consisting of durable high temperature silicone provide barrier from lubricating oils, hydraulic fluids and fossil fuels
- Backshells maintain a compression-fit design to resist maximum pull-out forces and facilitate strain-relief for jacketed cable ranges.
- Wire entry sealing available in four separate ranges for discrete wire applications
- Wide Thread Adapters (WTA) provide an enhanced threading for use with our wide variety of screw-on or clamshell backshells
- Smooth Ring Adapters (SRA) are designed for use without backshells for a smaller footprint
- Backshell Ring Adapters (BRA) allow for use with other compatible industry-standard snap-on backshells
- Utilizes A Series™ standard contact system (Stamped & Formed or Machined)



DuraMate™ AHDP - Material & Performance Specifications

| | | | |
|---------------------------------|--|-------------------|-------------------------|
| Current Rating per Contact | Size 4 - 100A / Size 4+ - 100A Size 8 - 60A / Size 8 RADSOK - 80A Size 12 - 25A Size 16 - 13A Size 20 - 7.5A | Housing Material | Thermoplastic |
| Operating Temperature | -55°C to +125°C | Insulation Insert | Thermoplastic |
| Dielectric Withstanding Voltage | Current Leakage -2mA at 1500 VAC | Seal | Silicone Rubber |
| Degree of Protection | IP68/69K (in mated condition) | Contact | A Series™ Common System |
| Mating Cycle Durability | 100 Cycles | Compliance | RoHS |



A Series™ Family

Standard products. Custom solutions

DuraMate™ AHDP - Insert Arrangements (1) C030 - 6 Position/2 Used (Size 4); (2) C041 - Receptacle w Diagnostic Keying; (3) CL20 - Plug w Diagnostic Keying; (4) CL22 - 7 Position Alt Construction)

| Size 18 | | | | | | | |
|-------------------------|----------------------------------|----------------------|-----------------------|---------------------------|---------------------------|------------------------------------|-----------------------|
| 18-06 (1) 2 x Size 4 | 18-06 2 x Size 4, 4 x Size 16 | 18-08 8 x Size 12 | 18-14 14 x Size 16 | 18-14 (2) 14 x Size 16 | 18-14 (3) 14 x Size 16 | 18-20 2 x Size 16, 18 x Size 20 | 18-21 21 x Size 20 |
| | | | | | | | |
| Normal | Normal | Normal | Reduced | Normal | Reduced | Normal | Reduced |

| Size 24 | | | | | | | | | |
|--|--------------------------------------|--|-----------------------|--|------------------------------------|------------------------------------|-----------------------|------------------------------------|---|
| 24-07 1 X Size 8 (RADSOK®) 6 X Size 12 | 24-07 (4) 3 X Size 4, 4 X Size 16 | 24-09 1 X Size 4, 2 X Size 8 6 X Size 12 | 24-16 16 X Size 12 | 24-18 1 X Size 8, 3 X Size 12 14 X Size 16 | 24-19 6 X Size 12, 13 X Size 16 | 24-21 4 X Size 12, 17 X Size 16 | 24-23 23 X Size 16 | 24-27 4 X Size 12, 23 X Size 16 | 24-29 4 X Size 12, 19 X Size 16 6 X Size 20 |
| | | | | | | | | | |
| Normal | Normal | Reduced | Normal | Reduced | Normal | Reduced | Normal | Reduced | Reduced |


| Size 24 | | |
|-----------------------|------------------------------------|------------------------------------|
| 24-31 31 X Size 16 | 24-35 3 X Size 16, 32 X Size 20 | 24-47 5 X Size 16, 42 X Size 20 |
| | | |
| Reduced | Thin | Reduced |

| Contact Legend (Size/Amperage) | | | | | |
|--------------------------------|---------------|--------------------------|----------------|----------------|-----------------|
| | | | | | |
| Size 4 or 4+ 100A | Size 8 60A | Size 8 RADSOK® 80A | Size 12 25A | Size 16 13A | Size 20 7.5A |













DuraMate™ AHDP - Recommended Wire Insulation Overall Diameter (OD) 4+ contact is only available for 24-07CL22

| Contact Size | Typical Wire Range | Normal Seal | Thin Seal | Reduced Seal (See datasheets) | |
|--------------|-------------------------------------|----------------------------|---------------------------|-------------------------------|----------------------------|
| 4+ | 4AWG (25.0-21.0mm ²) | 7.9-10.67mm (0.311-0.420") | - | - | - |
| 4 | 6AWG (16.0-13.0mm ²) | 6.63-7.41mm (0.261-0.292") | - | 6.63-7.41mm (0.261-0.292") | - |
| 8 | 8-10AWG (10.0-5.0mm ²) | 4.83-6.10mm (0.190-0.240") | - | 3.43-5.59mm (0.135-0.220") | - |
| 12 | 10-14AWG (6.0-2.0mm ²) | 3.43-4.32mm (0.1350-.170") | - | 2.46-4.01mm (0.135-0.158") | 2.46-4.01mm (0.135-0.158") |
| 16 | 14-20AWG (2.0-0.5mm ²) | 2.54-3.40mm (0.100-0.134") | 2.23-2.69mm (0.088-.106") | 1.35-3.05mm(0.053-0.120") | 1.35-2.62mm (0.053-0.103") |
| 20 | 16-22AWG (1.5-0.35mm ²) | 1.02-2.41mm (0.040-.095") | - | 1.02-02.41mm (0.040-0.095") | 1.02-2.10mm (0.040-0.083") |







DuraMate™ AHDP - Backshell Options and Accessory Overview










DuraMate™ AHDP - Plug & Receptacle Options (Dimensions in mm)

| Size 18 Plug | Size 18 Receptacle | Size 24 Plug | Size 24 Receptacle |
|---|---|--|---|
| Wide Thread Adapter (WTA)  | Wide Thread Adapter (WTA)  | Wide Thread Adapter (WTA)  | Wide Thread Adapter (WTA)  |
| Smooth Ring Adapter (SRA)  | Smooth Ring Adapter (SRA)  | Smooth Ring Adapter (SRA)  | Smooth Ring Adapter (SRA)  |
| Backshell Ring Adapter (BRA)  | Backshell Ring Adapter (BRA)  | Backshell Ring Adapter (BRA)  | Backshell Ring Adapter (BRA)  |

DuraMate™ AHDP w PanelMate™ - Receptacle Options (Dimensions in mm)

| Size 18 Plug | Size 18 Receptacle | Size 24 Plug | Size 24 Receptacle |
|--------------|---|--------------|---|
| - | PanelMate™ with Wide Thread Adapter (WTA)  | - | PanelMate™ with Wide Thread Adapter (WTA)  |
| - | PanelMate™ with Smooth Ring Adapter (SRA)  | - | PanelMate™ with Smooth Ring Adapter (SRA)  |
| - | PanelMate™ with Backshell Ring Adapter (BRA)  | - | PanelMate™ with Backshell Ring Adapter (BRA)  |

DuraMate™ AHDP - Backshell Options and Accessories

| Image | Part Number | Description |
|---|--------------------|---|
|  | AHDPBS-015-1805 | Size 18, Backshell, Conduit, Snap Over, Right Angle 90°, DuraMate™ AHDP Note: For use with Wide Thread Adapter (WTA). May also be used on DuraMate™ AHDM with P/N AHDM-BS-18NUT Adapter |
| | AHDPBS-15L017-1805 | Size 18, Backshell, Conduit, Snap-Over, Right Angle 180°, DuraMate™ AHDP Note: For use with Backshell Ring Adapter (BRA) |
| | AHDPBS-011-2405 | Size 24, Backshell, Conduit, Snap Over, Right Angle 90°, DuraMate™ AHDP Note: For use with Wide Thread Adapter (WTA). May also be used on DuraMate™ AHDM with P/N AHDM-BS-24NUT Adapter |
| | AHDPBS-11L017-2405 | Size 24, Backshell, Conduit, Snap-Over, Right Angle 180°, DuraMate™ AHDP Note: For use with Backshell Ring Adapter (BRA) |
|  | AHDPBS-016-1805 | Size 18, Backshell, Conduit, Snap Over, Straight 180°, DuraMate™ AHDP Note: For use with Wide Thread Adapter (WTA). May also be used on DuraMate™ AHDM with P/N AHDM-BS-18NUT Adapter |
| | AHDPBS-16L017-1805 | Size 18, Backshell, Conduit, Snap-Over, Straight, DuraMate™ AHDP Note: For use with Backshell Ring Adapter (BRA) |
| | AHDPBS-010-2405 | Size 24, Backshell, Conduit, Snap Over, Straight 180°, DuraMate™ AHDP Note: For use with Wide Thread Adapter (WTA). May also be used on DuraMate™ AHDM with P/N AHDM-BS-24NUT Adapter |
| | AHDPBS-10L017-2405 | Size 24, Backshell, Conduit, Snap-Over, Straight, DuraMate™ AHDP Note: For use with Backshell Ring Adapter (BRA) |
|  | AHDPBS-0406-001 | Size 24, Backshell, Tie Wrap, Wide Thread Adapter (WTA), DuraMate™ AHDP Note: For use with Wide Thread Adapter (WTA) |
| | AHDPBS-18-001 | Size 18, Backshell, Tie Wrap, Wide Thread Adapter (WTA), Cable Diameter Range 14.5mm - 18.0mm, DuraMate™ AHDP Note: For use with Wide Thread Adapter (WTA) |
|  | AHDPBS-0406-002 | Size 24, Backshell, Wide Thread Adapter (WTA), 2 PC, Compression Nut Cable Diameter Range 14.5mm - 18.0mm, DuraMate™ AHDP Note: For use with Wide Thread Adapter (WTA) |
| | AHDPBS-0406-003 | Size 24, Backshell, Wide Thread Adapter (WTA), 2 PC, Compression Nut Cable Diameter Range 19.5mm - 24.1mm, DuraMate™ AHDP Note: For use with Wide Thread Adapter (WTA) |
| | AHDPBS-18-002 | Size 18, Backshell, Wide Thread Adapter (WTA), 2PC, Compression Nut Cable Diameter Range 14.5mm-18.0mm, DuraMate™ AHDP Note: For use with Wide Thread Adapter (WTA) |
|  | AHDPBS-0406-SM01 | Size 24, Backshell, Sealed, Cable Grommet, DuraMate™ AHDP Note: For use with Wide Thread Adapter (WTA) |
| | AHDPBS-18-SM01 | Size 18, Backshell, Sealed, Cable Grommet, DuraMate™ AHDP Note: For use with Wide Thread Adapter (WTA) |
|  | AHDC06-24 | Size 24, Receptacle Cap, Sealed, DuraMate™ AHDP |
| | AHDC06-18 | Size 18, Receptacle Cap, Sealed, DuraMate™ AHDP |
|  | AHDC04-24 | Size 24, Plug Cap, Sealed, DuraMate™ AHDP |
| | AHDC04-18 | Size 18, Plug Cap, Sealed, DuraMate™ AHDP |

DuraMate™ AHDP - Backshell Options and Accessories, cont.

| Image | Part Number | Description |
|-------|---------------|--|
| | AHDC04-24-PM | Size 24, Plug Cap, Sealed, Threaded, DuraMate™ AHDP |
| | AHDC04-24-PMT | Size 24, Plug Cap, w Tether, Threaded, Lock Washer, Sealed, DuraMate™ AHDP |
| | AHDC04-24-T | Size 24, Plug Cap, w Tether, Sealed, DuraMate™ AHDP |
| | AHDP24-PN01 | Size 24, Panel Nut, Duramate™ AHDP |
| | AHDP18-PN01 | Size 18, Panel Nut, DuraMate™ AHDP |
| | AT14-001-2486 | Size 24, Lock Washer, Wave, Duramate™ AHDP |
| | AT14-002-1886 | Size 18, Lock Washer, Wave, DuraMate™ AHDP |
| | AHDP-16-04477 | Size 24, Rubber Flange Seal, Duramate™ AHDP |
| | AHDP-16-04978 | Size 18, Rubber Flange Seal, DuraMate™ AHDP |
| | A114019 | Size 4, Blank Seal Plug |
| | A114018 | Size 8, Blank Seal Plug |
| | A114017 | Size 12/16, Blank Seal Plug |
| | AT13-217-1605 | Size 16, Locking Seal Plug |
| | AT13-204-2005 | Size 20, Blank Seal Plug |
| | AT11-027-0405 | Size 4+, Contact Removal Tool, 4AWG |
| | AT114009 | Size 4, Contact Removal Tool, 6AWG |
| | AT11-001-3.6M | Size 8, Contact Removal Tool, 7-10AWG |
| | AT114008 | Size 8, Contact Removal Tool, 8-10AWG |
| | AT11-337-1205 | Size 12, Contact Removal Tool, 12-14AWG |
| | AT11-310-1605 | Size 16, Contact Removal Tool, 16-20AWG |
| | AT11-240-2005 | Size 20, Contact Removal Tool, 20-22AWG |



DM DuraMate™ AHDP ISOBUS 91 Series

Environmentally-Sealed, Multi-Pin, Heavy-Duty, Plastic Circular ISOBUS Connectors



Available in Size 24, 9 Position

Amphenol Sine Systems' **DuraMate™ AHDP ISOBUS 91 Series** of environmentally-sealed, multi-pin, heavy duty, circular plastic (AHDP) plugs & receptacles provide an economical, quick-connect, circular bayonet locking system **designed to meet ISO 11783 standards (for control and communications between tractors, implements and software) and withstand the challenges and complexities of harsh environment, off-road, agricultural applications.**

Key ISOBUS 91 Series Features

- + One-to-one alternative for all HDP20 parts
- + Compatible to other industry standard circular bayonet versions
- + AHDP 91 Series Plugs have a jumper (bridged contacts) between Pin 4 & 5. (-P064 options have no jumper (bridged contacts) between Pin 4 & 5.)
- + AHDP 91 Series Receptacles do not have a jumper (bridged contact)
- + Options for up to 6AWG/16mm² power wires
- + Full range of backshell options

DuraMate™ Features

- 3 key-way bayonet design ensures proper mating of connectors
- High density signal and mixed power insert configurations
- Operating temperature range: -55°C to +125°C
- High-strength, impact resistant & lightweight thermoplastic housings
- Low-insertion force stamped terminals offer improved manufacturing efficiencies
- Environmentally-sealed and engineered rapid and secure mating system achieves IP67/IP69K protection (in mated condition) from ingress of dust, water, mud and other contaminants and is vibration resistant
- Sealing features consisting of durable high-temperature silicone provide barrier from lubricating oils, hydraulic fluids and fossil fuels
- Backshells maintain a compression-fit design to resist maximum pull-out forces and facilitate strain-relief for jacketed cable ranges
- Wire entry sealing available in four separate ranges for discrete wire applications
- Wide Thread Adapters (WTA) provides an enhanced threading for use with our wide variety of screw-on or clamshell backshells
- Smooth Ring Adapters (SRA) are designed for use without backshells for a smaller footprint
- Utilizes A Series™ standard contact system (Stamped & Formed or Machined)



DuraMate™ AHDP ISOBUS 91 Series - Material & Performance Specifications






| | | | |
|---------------------------------|---|-------------------|-------------------------|
| Current Rating per Contact | Size 8, 60A Size 12, 25A Size 16, 13A | Housing Material | Thermoplastic |
| Operating Temperature | -55°C to +125°C | Insulation Insert | Thermoplastic |
| Dielectric Withstanding Voltage | Current Leakage -2mA at 1500 VAC | Seal | Silicone Rubber |
| Degree of Protection | IP68/69K (in mated condition) | Contact | A Series™ Common System |
| Mating Cycle Durability | 100 Cycles | Compliance | RoHS |

A Series™ Family



Standard products. Custom solutions

DuraMate™ AHDP ISOBUS 91 Series - Insert Arrangements

| | | | | |
|--|---|---|---|---|
| Size 24 | Contact Legend (Size/Amperage) | | | |
| 24-09 2 x Size 8, 2 x Size 12, 5 x Size 16 |  |  |  |  |
|  | Size 8 (6AWG) 60A | Size 8 (8-10AWG) 60A | Size 12 25A | Size 16 13A |
| Normal | Reduced | | | |









DuraMate™ AHDP ISOBUS 91 Series - Recommended Wire Insulation Overall Diameter (OD)

| Contact Size | Typical Wire Range | Normal Seal | Reduced Seal | Reduced Seal for 6AWG/16mm² (Size 8 Contacts Only) |
|--------------|-----------------------|----------------------------|----------------------------|--|
| 8 | 6-10AWG (5.0-16.0mm²) | 4.83-6.10mm (0.190-0.240") | 3.43-5.59mm (0.135-0.220") | 6.50-7.42mm (0.256-0.292") |
| 12 | 10-14AWG (6.0-2.0mm²) | 3.40-4.32mm (0.134-0.170") | 2.46-4.01mm (0.135-0.158") | 2.46-4.01mm (0.135-0.158") |
| 16 | 14-20AWG (2.0-0.5mm²) | 2.54-3.40mm (0.100-0.134") | 1.35-3.05mm (0.053-0.120") | 1.35-3.05mm (0.053-0.120")z |









DuraMate™ AHDP ISOBUS 91 Series - Backshell Options and Accessory Overview






DuraMate™ AHDP ISOBUS 91 Series - Plug & Receptacle Options (Dimensions in mm)

| Size 24 Plug | Size 24 Receptacle | Size 24 Plug | Size 24 Receptacle |
|--|---|---|---|
| Wide Thread Adapter (WTA) | Wide Thread Adapter (WTA) | Smooth Ring Adapter (SRA) | Smooth Ring Adapter (SRA) |
|   |   |   |   |




DuraMate™ AHDP ISOBUS 91 Series - Plugs

| Image | Part Number | Description | Size/Amps | Voltage |
|---|----------------------|--|---|---------|
|  | AHDP06-24-91SN-SRA | 9 Position, Plug, Socket, Size 24, DuraMate™ AHDP ISOBUS 91 Series, Plastic, Normal Diameter Seal (Green), Smooth Ring Adapter (SRA) | Size 8, 60A Size 12, 25A Size 16, 13A | 250V |
|  | AHDP06-24-91SN-WTA | 9 Position, Plug, Socket, Size 24, DuraMate™ AHDP ISOBUS 91 Series, Plastic, Normal Diameter Seal (Green), Wide Thread Adapter (WTA) | Size 8, 60A Size 12, 25A Size 16, 13A | 250V |
|  | AHDP06-24-91SR-SRA | 9 Position, Plug, Socket, Size 24, DuraMate™ AHDP ISOBUS 91 Series, Plastic, Reduced Diameter Seal (Blue), Smooth Ring Adapter (SRA) | Size 8, 60A Size 12, 25A Size 16, 13A | 250V |
|  | AHDP06-24-91SR-WTA | 9 Position, Plug, Socket, Size 24, DuraMate™ AHDP ISOBUS 91 Series, Plastic, Reduced Diameter Seal (Blue), Wide Thread Adapter (WTA) | Size 8, 60A Size 12, 25A Size 16, 13A | 250V |
|  | AHDP06-24-91SR16-SRA | 9 Pos, Plug, Socket, Size 24, DuraMate™ AHDP ISOBUS 91 Series, Plastic, Reduced Diameter Seal (Blue), Smooth Ring Adapter (SRA), Size 8 Contact, 6AWG/16mm² Wire Seal Note: Use AT62-203-08141-16 contacts for 6AWG/16mm² applications | Size 8, 60A Size 12, 25A Size 16, 13A | 250V |
|  | AHDP06-24-91SR16-WTA | 9 Pos, Plug, Socket, Size 24, DuraMate™ AHDP ISOBUS 91 Series, Plastic, Reduced Diameter Seal (Blue), Wide Thread Adapter (WTA), Size 8 Contact, 6AWG/16mm² Wire Seal Note: Use AT62-203-08141-16 contacts for 6AWG/16mm² applications | Size 8, 60A Size 12, 25A Size 16, 13A | 250V |
|  | AHDP06-24-91SN-P064 | Size 24, 9 Position, Plug, Socket, DuraMate™ AHDP ISOBUS 91 Series, Plastic, Normal Diameter Seal, Smooth Ring Adapter (SRA) (Green) No Jumper (Bridged Contacts) Between Pin 4 & 5 | Size 8, 60A Size 12, 25A Size 16, 13A | 250V |
|  | AHDP06-24-91SR-P064 | Size 24, 9 Position, Plug, Socket, DuraMate™ AHDP ISOBUS 91 Series, Plastic, Reduced Diameter Seal, Smooth Ring Adapter (SRA) (Green) No Jumper (Bridged Contacts) Between Pin 4 & 5 | Size 8, 60A Size 12, 25A Size 16, 13A | 250V |

DuraMate™ AHDP ISOBUS 91 Series - Receptacles

| Image | Part Number | Description | Size/Amps | Voltage |
|---|--------------------|--|---|---------|
|  | AHDP04-24-91PN-SRA | 9 Pos, Receptacle, Pin, Size 24, DuraMate™ AHDP ISOBUS 91 Series, Plastic, Normal Diameter Seal (Green), Smooth Ring Adapter (SRA) | Size 8, 60A Size 12, 25A Size 16, 13A | 250V |
|  | AHDP04-24-91PN-WTA | 9 Pos, Receptacle, Pin, Size 24, DuraMate™ AHDP ISOBUS 91 Series, Plastic, Normal Diameter Seal (Green), Wide Thread Adapter (WTA) | Size 8, 60A Size 12, 25A Size 16, 13A | 250V |
|  | AHDP04-24-91PR-SRA | 9 Pos, Receptacle, Pin, Size 24, DuraMate™ AHDP ISOBUS 91 Series, Plastic, Reduced Diameter Seal (Blue), Smooth Ring Adapter (SRA) | Size 8, 60A Size 12, 25A Size 16, 13A | 250V |














DuraMate™ AHDP ISOBUS 91 Series - Receptacles, cont.

| Image | Part Number | Description | Size/Amps | Voltage |
|---|----------------------|---|---|---------|
|  | AHDP04-24-91PR-WTA | 9 Pos, Receptacle, Pin, Size 24, DuraMate™ AHDP ISOBUS 91 Series, Plastic, Reduced Diameter Seal (Blue), Wide Thread Adapter (WTA) | Size 8, 60A Size 12, 25A Size 16, 13A | 250V |
|  | AHDP04-24-91PR16-SRA | 9 Pos, Receptacle, Pin, Size 24, DuraMate™ AHDP ISOBUS 91 Series, Plastic, Reduced Diameter Seal (Blue), Smooth Ring Adapter (SRA), Size 8 Contact, 6AWG/16mm² Wire Seal Note: Use AT60-204-08141-16 contacts for 6AWG/16mm² applications | Size 8, 60A Size 12, 25A Size 16, 13A | 250V |
|  | AHDP04-24-91PR16-WTA | 9 Pos, Receptacle, Pin, Size 24, DuraMate™ AHDP ISOBUS 91 Series, Plastic, Reduced Diameter Seal (Blue), Wide Thread Adapter (WTA), Size 8 Contact, 6AWG/16mm² Wire Seal Note: Use AT60-204-08141-16 contacts for 6AWG/16mm² applications | Size 8, 60A Size 12, 25A Size 16, 13A | 250V |

DuraMate™ AHDP ISOBUS 91 Series - Backshell Options and Accessories

| Image | Part Number | Description |
|---|------------------|--|
|  | AHDPBS-011-2405 | Size 24, Backshell, Conduit, Snap Over, Right Angle 90°, DuraMate™ AHDP ISOBUS 91 Series Note: For use with Wide Thread Adapter (WTA). May also be used on DuraMate™ AHDM with P/N AHDM-BS-24NUT Adapter |
|  | AHDPBS-010-2405 | Size 24, Backshell, Conduit, Snap Over, Straight 180°, DuraMate™ AHDP ISOBUS 91 Series Note: For use with Wide Thread Adapter (WTA). May also be used on DuraMate™ AHDM with P/N AHDM-BS-24NUT Adapter |
|  | AHDPBS-0406-001 | Size 24, Backshell, Tie Wrap, Wide Thread Adapter (WTA), DuraMate™ AHDP ISOBUS 91 Series Note: For use with Wide Thread Adapter (WTA). |
|  | AHDPBS-0406-002 | Size 24, Backshell, Wide Thread Adapter (WTA), 2 PC, Compression Nut, Cable Diameter Range 14.5mm - 18.0mm, DuraMate™ AHDP ISOBUS 91 Series |
| | AHDPBS-0406-003 | Size 24, Backshell, Wide Thread Adapter (WTA), 2 PC, Compression Nut, Cable Diameter Range 19.5mm - 24.1mm, DuraMate™ AHDP ISOBUS 91 Series |
|  | AHDPBS-0406-SM01 | Size 24, Backshell, Sealed, Cable Grommet, DuraMate™ AHDP ISOBUS 91 Series |
|  | AHDC06-24 | Size 24, Receptacle Cap, Sealed, DuraMate™ AHDP ISOBUS 91 Series |
|  | AHDC04-24-PM | Size 24, Plug Cap, Sealed, Threaded, DuraMate™ AHDP ISOBUS 91 Series |

DuraMate™ AHDP ISOBUS 91 Series - Backshell Options and Accessories, cont.

| Image | Part Number | Description |
|---|-------------------|---|
|  | AHDC04-24-PMT | Size 24, Plug Cap, w Tether, Threaded, Lock Washer, Sealed, DuraMate™ AHDP ISOBUS 91 Series |
|  | AHDP24-PN01 | Size 24, Panel Nut, DuraMate™ AHDP ISOBUS 91 Series |
|  | AT14-001-2486 | Size 24, Lock Washer, Wave, DuraMate™ AHDP ISOBUS 91 Series |
|  | AHDP-16-04477 | Size 24, Rubber Flange Seal, DuraMate™ AHDP ISOBUS 91 Series |
|  | A114018 | Size 8, Blank Seal Plug |
|  | A114017 | Size 12/16, Blank Seal Plug |
|  | AT13-217-1605 | Size 16, Locking Seal Plug |
|  | AT11-310-1605 | Size 16, Contact Removal Tool, Light Blue, 16-20AWG |
|  | AT11-337-1205 | Size 12, Contact Removal Tool, Orange, 12-14AWG |
|  | AT11-001-3.6M | Size 8, Contact Removal Tool, Black, 7-10AWG |
|  | AT114008 | Size 8, Contact Removal Tool, Green, 8-10AWG |
|  | AT60-204-08141-16 | Size 8, 6AWG/16mm² Wire Range, Contact, Pin, Nickel-plated Note: Refer to Plug/Receptacle datasheets for a complete list of available contacts |
|  | AT62-203-08141-16 | Size 8, 6AWG/16mm² Wire Range, Contact, Socket, Nickel-plated Note: Refer to Plug/Receptacle datasheets for a complete list of available contacts |



DM Dura|Mate™ AHDM

Environmentally-Sealed, Multi-Pin, Heavy-Duty, Metal, Circular Connectors

Available in Size 18 with 6 insert arrangements 2, 6, 8, 14, 20 and 21
Available in Size 24 with 13 insert arrangements 7(x2), 9, 16, 18, 19, 21, 23, 27, 29, 31, 35 and 47

The **DuraMate™ AHDM** environmentally-sealed, multi-pin, heavy duty, metal, circular connector series provides an economical quick-connect bayonet locking system manufactured to withstand the challenges and complexities of harsh environment off-road applications.

- 3 key-way bayonet design ensures proper mating of connectors
- High density signal and mixed power insert configurations
- Operating temperature range: -55°C to +125°C
- High current configurations incorporating revolutionary RADSOK® contacts
- High strength impact resistant & lightweight zinc-alloy metal housings
- Low insertion force stamped terminals offer improved manufacturing efficiencies
- Environmentally-sealed and engineered rapid and secure mating system achieves IP68/IP69K protection (in mated condition) from ingress of dust, water, mud and other contaminants and is vibration resistant.
- Sealing features consisting of durable high temperature silicone provide barrier from lubricating oils, hydraulic fluids and fossil fuels
- Backshells maintain a compression-fit design to resist maximum pull-out forces and facilitate strain-relief for jacketed cable ranges.
- Utilizes A Series™ standard contact system (Stamped & Formed or Machined)
- Wire entry sealing available in three separate ranges for discrete wire applications
- Integrated Wide Threading provides an enhanced threading for use with our wide variety of screw-on or clamshell backshells



DuraMate™ AHDM - Material & Performance Specifications

| | | | |
|---------------------------------|--|-------------------|-------------------------|
| Current Rating per Contact | Size 4 - 100A / Size 4+ - 100A Size 8 - 60A / Size 8 RADSOK - 80A Size 12 - 25A Size 16 - 13A Size 20 - 7.5A | Housing Material | Zinc-Alloy |
| Operating Temperature | -55°C to +125°C | Insulation Insert | Thermoplastic |
| Dielectric Withstanding Voltage | Current Leakage -2mA at 1500 VAC | Seal | Silicone Rubber |
| Degree of Protection | IP68/69K (in mated condition) | Contact | A Series™ Common System |
| Mating Cycle Durability | 100 Cycles | Compliance | RoHS |

A Series™ Family



Standard products. Custom solutions

DuraMate™ AHDM - Insert Arrangements (1) C030 - 6 Position/2 Used (Size 4); (4) CL22 - 7 Position Alt Construction)

| Size 18 | | | | | |
|-------------------------|----------------------------------|----------------------|-----------------------|------------------------------------|-----------------------|
| 18-06 (1) 2 x Size 4 | 18-06 2 x Size 4, 4 x Size 16 | 18-08 8 x Size 12 | 18-14 14 x Size 16 | 18-20 2 x Size 16, 18 x Size 20 | 18-21 21 x Size 20 |
| | | | | | |
| Normal | Normal | Normal | Reduced | Normal | Reduced |

| Contact Legend (Size/Amperage) | | | | | |
|--------------------------------|---------------|--------------------------|----------------|----------------|-----------------|
| | | | | | |
| Size 4 or 4+ 100A | Size 8 60A | Size 8 RADSOK® 80A | Size 12 25A | Size 16 13A | Size 20 7.5A |

| Size 24 | | | | | | | | | |
|--|--------------------------------------|--|-----------------------|--|------------------------------------|------------------------------------|-----------------------|------------------------------------|---|
| 24-07 1 X Size 8 (RADSOK®) 6 X Size 12 | 24-07 (4) 3 X Size 4, 4 X Size 16 | 24-09 1 X Size 4, 2 X Size 8 6 X Size 12 | 24-16 16 X Size 12 | 24-18 1 X Size 8, 3 X Size 12 14 X Size 16 | 24-19 6 X Size 12, 13 X Size 16 | 24-21 4 X Size 12, 17 X Size 16 | 24-23 23 X Size 16 | 24-27 4 X Size 12, 23 X Size 16 | 24-29 4 X Size 12, 19 X Size 16 6 X Size 20 |
| | | | | | | | | | |
| Normal | Normal | Reduced | Normal | Reduced | Normal | Reduced | Normal | Reduced | Reduced |

| Size 24 | | |
|-----------------------|------------------------------------|------------------------------------|
| 24-31 31 X Size 16 | 24-35 3 X Size 16, 32 X Size 20 | 24-47 5 X Size 16, 42 X Size 20 |
| | | |
| Reduced | Thin | Reduced |





DuraMate™ AHDM - Recommended Wire Insulation Overall Diameter (OD) 4+ contact is only available for 24-07CL22

| Contact Size | Typical Wire Range | Normal Seal | Thin Seal | Reduced Seal (See datasheets) | |
|--------------|-------------------------------------|----------------------------|----------------------------|-------------------------------|----------------------------|
| 4+ | 4AWG (25.0-21.0mm ²) | 7.9-10.67mm (0.311-0.420") | - | - | - |
| 4 | 6AWG (16.0-13.0mm ²) | 6.63-7.41mm (0.261-0.292") | - | 6.63-7.41mm (0.261-0.292") | - |
| 8 | 8-10AWG (10.0-5.0mm ²) | 4.83-6.10mm (0.190-0.240") | - | 3.43-5.59mm (0.135-0.220") | - |
| 12 | 10-14AWG (6.0-2.0mm ²) | 3.43-4.32mm (0.135-0.170") | - | 2.46-4.01mm (0.135-0.158") | 2.46-4.01mm (0.135-0.158") |
| 16 | 14-20AWG (2.0-0.5mm ²) | 2.54-3.40mm (0.100-0.134") | 2.23-2.69mm (0.088-0.106") | 1.35-3.05mm (0.053-0.120") | 1.35-2.62mm (0.053-0.103") |
| 20 | 16-22AWG (1.5-0.35mm ²) | 1.02-2.41mm (0.040-0.095") | - | 1.02-2.41mm (0.040-0.095") | 1.02-2.10mm (0.040-0.083") |







DuraMate™ AHDM - Backshell Options and Accessory Overview










DuraMate™ AHDM - Plug & Receptacle Options (Dimensions in mm)

| Size 18 Standard Plug | Size 18 Standard Receptacle | Size 24 Standard Plug | Size 24 Standard Receptacle |
|---|---|--|---|
| Integrated Wide Threading | Integrated Wide Threading | Integrated Wide Threading | Integrated Wide Threading |
|  |  |  |  |

DuraMate™ AHDM - Backshell Options and Accessories

| Image | Part Number | Description |
|---|----------------|--|
|  | AHDMBS-24-002 | Size 24, Backshell, 2 PC, DuraMate™ AHDM |
| | AHDMBS-18-002 | Size 18, Backshell, 2 PC, DuraMate™ AHDM |
|  | AHDMBS-24-001 | Size 24, Backshell, Tie Wrap, End Bell, DuraMate™ AHDM |
| | AHDMBS-18-001 | Size 18, Backshell, Tie Wrap, End Bell, DuraMate™ AHDM |
|  | AHDMBS-24-059 | Size 24, Backshell, w Cable Clamp, DuraMate™ AHDM |
| | AHDMBS-18-059 | Size 18, Backshell, w Cable Clamp, DuraMate™ AHDM |
|  | AHDMBS-24-SM01 | Size 24, Backshell, Metal, DuraMate™ AHDM |
| | AHDMBS-18-SM01 | Size 18, Backshell, Metal, DuraMate™ AHDM |
|  | AHDM-BS-24NUT | Size 24, Adapter for use with: AHPBS-010-2405 AHDP Backshell, Conduit, Snap-Over, Straight 180 AHPBS-011-2405 AHDP Backshell, Conduit, Snap-Over, Right Angle 90 |
| | AHDM-BS-18NUT | Size 18, Adapter for use with: AHPBS-015-1805 AHDP Backshell, Conduit, Snap-Over, Straight 180 AHPBS-016-1805 AHDP Backshell, Conduit, Snap-Over, Right Angle 90 |
|  | AHDC34-24 | Size 24, Protective Cap for Plug, DuraMate™ AHDM |
| | AHDC34-18 | Size 18, Protective Cap for Plug, DuraMate™ AHDM |
|  | AHDC36-24 | Size 24, Protective Cap for Receptacle, DuraMate™ AHDM |
| | AHDC36-18 | Size 18, Protective Cap for Receptacle, DuraMate™ AHDM |
|  | A112264 | Size 24, Lockwasher, DuraMate™ AHDM |
| | A114021 | Size 18, Lockwasher, DuraMate™ AHDM |

DuraMate™ AHDM - Backshell Options and Accessories, cont.

| Image | Part Number | Description |
|---|---------------|---|
|  | A112263-90 | Size 24, Nut, DuraMate™ AHDM |
| | A114020-90 | Size 18, Nut, DuraMate™ AHDM |
|  | A114019 | Size 4, Blank Seal Plug |
|  | A114018 | Size 8, Blank Seal Plug |
|  | A114017 | Size 12/16, Blank Seal Plug |
|  | AT13-217-1605 | Size 16, Locking Seal Plug |
|  | AT13-204-2005 | Size 20, Blank Seal Plug |
|  | AT11-027-0405 | Size 4+, Contact Removal Tool, 4AWG |
| | AT114009 | Size 4, Contact Removal Tool, 6AWG |
| | AT11-001-3.6M | Size 8, Contact Removal Tool, 7-10AWG |
| | AT114008 | Size 8, Contact Removal Tool, 8-10AWG |
| | AT11-337-1205 | Size 12, Contact Removal Tool, 12-14AWG |
| | AT11-310-1605 | Size 16, Contact Removal Tool, 16-20AWG |
| | AT11-240-2005 | Size 20, Contact Removal Tool, 20-22AWG |



DM DuraMate™ AHDM/AHDBM ISOBUS 91 Series

Environmentally-Sealed, Multi-Pin, Heavy-Duty, Metal Circular ISOBUS Connectors

Available in Size 24, 9 Position

Amphenol Sine Systems' DuraMate™ AHDM/AHDBM ISOBUS 91 Series of environmentally-sealed, multi-pin, heavy-duty, circular metal plugs (AHDM) and breakaway metal (AHDBM) plugs & receptacles provide an economical, quick-connect, bayonet locking system **designed to meet ISO 11783 standards (for control and communications between tractors, implements and software) and withstand the challenges and complexities of harsh environment, off-road, agricultural applications.**

Key ISOBUS 91 Series Features

- + One-to-one alternative for all HD30/HDB36 parts
- + Compatible to other industry standard (Circular Bayonet) versions while retaining full breakaway functionality
- + AHDM 91 Series Plugs have a jumper (bridged contacts) between Pin 4 & 5
- + AHDM/AHDBM 91 Series Receptacles don't have a jumper (bridged contact)
- + Options for up to 16mm² power wires
- + Full range of backshell options

Important

- AHDBM 91 Series Plugs are intermateable to other industry standard versions and allow full breakaway functionality if used with suitable breakaway-ready Receptacles (like AHDBM 91 Receptacles)
- AHDM 91 Series Plugs are intermateable to other industry standard versions but do not retain breakaway functionality
- AHDBM 91 Series Receptacles (Circular Bayonet) are intermateable to other industry standard plugs and allow breakaway functionality when used with a breakaway Plugs (like AHDBM 91 Plugs)
- Available upon request and not shown on this flyer: AHDM 91 Series Receptacles (Drop Shaped Bayonet) are not intermateable to all industry standard versions and do not retain breakaway functionality

DuraMate™ Features

- 3 key-way bayonet design ensures proper mating of connectors
- High density signal and mixed power insert configurations
- Operating temperature range: -55°C to +125°C
- High-strength, impact resistant & lightweight zinc-alloy metal housings
- Low-insertion force stamped terminals offer improved manufacturing efficiencies
- Environmentally-sealed and engineered rapid and secure mating system achieves IP67/IP69K protection (in mated condition) from ingress of dust, water, mud and other contaminants and is vibration resistant
- Sealing features consisting of durable high-temperature silicone provide barrier from lubricating oils, hydraulic fluids and fossil fuels
- Backshells maintain a compression-fit design to resist maximum pull-out forces and facilitate strain-relief for jacketed cable ranges
- Wire entry sealing available in four separate ranges for discrete wire applications
- Integrated Wide Threading provides an enhanced threading for use with our wide variety of screw-on or clamshell backshells
- Utilizes A Series™ standard contact system (Stamped & Formed or Machined)

AHDBM Circular Bayonet Breakaway-Ready Receptacle



AHDM Circular Bayonet Standard Plug

AHDBM Circular Bayonet Breakaway Plug



A Series™ Family




Standard products. Custom solutions

DuraMate™ AHDM/AHDBM ISOBUS 91 Series - Material & Performance Specifications

| | | | |
|---------------------------------|---|-------------------|---------------------------|
| Current Rating per Contact | Size 8, 60A; Size 12, 25A; Size 16, 13A | Housing Material | Zinc-alloy/Aluminum-alloy |
| Operating Temperature | -55°C to +125°C | Insulation Insert | Thermoplastic |
| Dielectric Withstanding Voltage | Current Leakage-2mA at 1500 VAC | Seal | Silicone Rubber |
| Degree of Protection | IP68/69K (in mated condition) | Contact | A Series™ Common System |
| Mating Cycle Durability | 100 Cycles | Compliance | RoHS |

DuraMate™ AHDM/AHDBM ISOBUS 91 Series - Insert Arrangements

| | | | | | | | | | |
|---|--|----------------|----------------|--|--|-------------------------|----------------------------|----------------|----------------|
| <p>Size 24</p> <p>24-09 2 x Size 8, 2 x Size 12, 5 x Size 16</p>  <p>Normal Reduced</p> | <p>Contact Legend (Size/Amperage)</p> <table border="1"> <tr> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>Size 8 (6AWG) 60A</td> <td>Size 8 (8-10AWG) 60A</td> <td>Size 12 25A</td> <td>Size 16 13A</td> </tr> </table> | | | | | Size 8 (6AWG) 60A | Size 8 (8-10AWG) 60A | Size 12 25A | Size 16 13A |
| | | | | | | | | | |
| Size 8 (6AWG) 60A | Size 8 (8-10AWG) 60A | Size 12 25A | Size 16 13A | | | | | | |




DuraMate™ AHDM/AHDBM ISOBUS 91 Series - Recommended Wire Insulation Overall Diameter (OD)

| Contact Size | Typical Wire Range | Normal Seal | Reduced Seal | Reduced Seal for 6AWG/16mm² (Size 8 Contacts Only) |
|--------------|-----------------------|----------------------------|----------------------------|--|
| 8 | 6-10AWG (5.0-16.0mm²) | 4.83-6.10mm (0.190-0.240") | 3.43-5.59mm (0.135-0.220") | 6.50-7.42mm (0.256-0.292") |
| 12 | 10-14AWG (6.0-2.0mm²) | 3.40-4.32mm (0.134-0.170") | 2.46-4.01mm (0.135-0.158") | 2.46-4.01mm (0.135-0.158") |
| 16 | 14-20AWG (2.0-0.5mm²) | 2.54-3.40mm (0.100-0.134") | 1.35-3.05mm (0.053-0.120") | 1.35-3.05mm (0.053-0.120") |

DuraMate™ AHDM/AHDBM ISOBUS 91 Series - Backshell Options and Accessory Overview



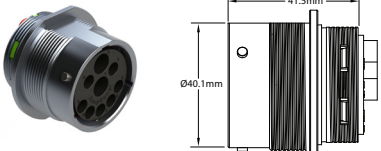


DuraMate™ AHDM ISOBUS 91 Series - Plug & Receptacle Options (Dimensions in mm)

| Size 24 Plug | Size 24 Breakaway Plug | Size 24 Breakaway Receptacle |
|---|--|---|
| Integrated Wide Threading | Integrated Wide Threading | Integrated Wide Threading |
|  |  |  |




DuraMate™ AHDM ISOBUS 91 Series - Plugs

| Image | Part Number | Description | Size/Amps | Voltage |
|--|----------------------|--|---|---------|
|  | AHDM06-24-91SN | 9 Pos, Plug, Socket, Size 24, DuraMate™ AHDM ISOBUS 91 Series, Metal, Normal Diameter Seal (Green), Integrated Wide Threading | Size 8, 60A Size 12, 25A Size 16, 13A | 250V |
|  | AHDM06-24-91SN-059 | 9 Pos, Kit, Plug, Socket, Size 24, DuraMate™ AHDM ISOBUS 91 Series, Metal, Normal Diameter Seal (Green), Integrated Wide Threading, Cable Clamp Backshell | Size 8, 60A Size 12, 25A Size 16, 13A | 250V |
|  | AHDM06-24-91SR | 9 Pos, Plug, Socket, Size 24, DuraMate™ AHDM ISOBUS 91 Series, Metal, Reduced Diameter Seal (Blue), Integrated Wide Threading | Size 8, 60A Size 12, 25A Size 16, 13A | 250V |
|  | AHDM06-24-91SR-059 | 9 Pos, Kit, Plug, Socket, Size 24, DuraMate™ AHDM ISOBUS 91 Series, Metal, Reduced Diameter Seal (Blue), Integrated Wide Threading, Cable Clamp Backshell | Size 8, 60A Size 12, 25A Size 16, 13A | 250V |
|  | AHDM06-24-91SR16 | 9 Pos, Plug, Socket, Size 24, DuraMate™ AHDM ISOBUS 91 Series, Metal, Reduced Diameter Seal (Blue), Integrated Wide Threading, Size 8 Contact, 6AWG/16mm ² Wire Seal Note: Use AT62-203-08141-16 contacts for 6AWG/16mm ² applications | Size 8, 60A Size 12, 25A Size 16, 13A | 250V |
|  | AHDM06-24-91SR16-059 | 9 Pos, Kit, Plug, Socket, Size 24, DuraMate™ AHDM ISOBUS 91 Series, Metal, Reduced Diameter Seal (Blue), Integrated Wide Threading, Cable Clamp Backshell, Size 8 Contact, 6AWG/16mm ² Wire Seal Note: Use AT62-203-08141-16 contacts for 6AWG/16mm ² applications | Size 8, 60A Size 12, 25A Size 16, 13A | 250V |

DuraMate™ AHDBM ISOBUS 91 Series - Breakaway Plugs

| Image | Part Number | Description | Size/Amps | Voltage |
|---|---------------------|---|---|---------|
|  | AHDBM06-24-91SN | 9 Pos, Plug, Socket, Size 24, DuraMate™ AHDBM ISOBUS 91 Series, Metal, Normal Diameter Seal (Green), Integrated Wide Threading, Breakaway-Ready | Size 8, 60A Size 12, 25A Size 16, 13A | 250V |
|  | AHDBM06-24-91SN-059 | 9 Pos, Kit, Plug, Socket, Size 24, DuraMate™ AHDBM ISOBUS 91 Series, Metal, Normal Diameter Seal (Green), Integrated Wide Threading, Cable Clamp Backshell, Breakaway-Ready | Size 8, 60A Size 12, 25A Size 16, 13A | 250V |
|  | AHDBM06-24-91SR | 9 Pos, Plug, Socket, Size 24, DuraMate™ AHDBM ISOBUS 91 Series, Metal, Reduced Diameter Seal (Blue), Integrated Wide Threading, Breakaway-Ready | Size 8, 60A Size 12, 25A Size 16, 13A | 250V |





DuraMate™ AHDBM ISOBUS 91 Series - Breakaway Plugs, cont.

| Image | Part Number | Description | Size/Amps | Voltage |
|---|-----------------------|--|---|---------|
|  | AHDBM06-24-91SR-059 | 9 Pos, Kit, Plug, Socket, Size 24, DuraMate™ AHDBM ISOBUS 91 Series, Metal, Reduced Diameter Seal (Blue), Integrated Wide Threading, Cable Clamp Backshell, Breakaway-Ready | Size 8, 60A Size 12, 25A Size 16, 13A | 250V |
|  | AHDBM06-24-91SR16 | 9 Pos, Kit, Plug, Socket, Size 24, DuraMate™ AHDBM ISOBUS 91 Series, Metal, Reduced Diameter Seal (Blue), Integrated Wide Threading, Cable Clamp Backshell, Breakaway, Size 8 Contact, 6AWG/16mm² Wire Seal Note: Use AT62-203-08141-16 contacts for 6AWG/16mm² applications | Size 8, 60A Size 12, 25A Size 16, 13A | 250V |
|  | AHDBM06-24-91SR16-059 | 9 Pos, Plug, Socket, Size 24, DuraMate™ AHDBM ISOBUS 91 Series, Metal, Reduced Diameter Seal (Blue), Integrated Wide Threading, Breakaway, Size 8 Contact, 6AWG/16mm² Wire Seal Note: Use AT62-203-08141-16 contacts for 6AWG/16mm² applications | Size 8, 60A Size 12, 25A Size 16, 13A | 250V |






DuraMate™ AHDBM ISOBUS 91 Series - Breakaway-Ready Receptacles

| Image | Part Number | Description | Contact Size/Amps | Voltage |
|---|-----------------------|---|---|---------|
|  | AHDBM04-24-91PN | 9 Pos, Receptacle, Pin, Size 24, DuraMate™ AHDBM ISOBUS 91 Series, Metal, Normal Diameter Seal (Green), Integrated Wide Threading, Breakaway-Ready | Size 8, 60A Size 12, 25A Size 16, 13A | 250V |
|  | AHDBM04-24-91PN-059 | 9 Pos, Kit, Receptacle, Pin, Size 24, DuraMate™ AHDBM ISOBUS 91 Series, Metal, Normal Diameter Seal (Green), Integrated Wide Threading, Cable Clamp Backshell, Breakaway-Ready | Size 8, 60A Size 12, 25A Size 16, 13A | 250V |
|  | AHDBM04-24-91PR | 9 Pos, Receptacle, Pin, Size 24, DuraMate™ AHDBM ISOBUS 91 Series, Metal, Reduced Diameter Seal (Blue), Integrated Wide Threading, Breakaway-Ready | Size 8, 60A Size 12, 25A Size 16, 13A | 250V |
|  | AHDBM04-24-91PR-059 | 9 Pos, Kit, Receptacle, Pin, Size 24, DuraMate™ AHDBM ISOBUS 91 Series, Metal, Reduced Diameter Seal (Blue), Integrated Wide Threading, Cable Clamp Backshell, Breakaway-Ready | Size 8, 60A Size 12, 25A Size 16, 13A | 250V |
|  | AHDBM04-24-91PR16 | 9 Pos, Receptacle, Pin, Size 24, DuraMate™ AHDBM ISOBUS 91 Series, Metal, Reduced Diameter Seal (Blue), Integrated Wide Threading, Breakaway-Ready, Size 8 Contact, 6AWG/16mm² Wire Seal Note: Use AT60-204-08141-16 contacts for 6AWG/16mm² applications | Size 8, 60A Size 12, 25A Size 16, 13A | 250V |
|  | AHDBM04-24-91PR16-059 | 9 Pos, Kit, Receptacle, Pin, Size 24, DuraMate™ AHDBM ISOBUS 91 Series, Metal, Reduced Diameter Seal (Blue), Integrated Wide Threading, Cable Clamp Backshell, Breakaway-Ready, Size 8 Contact, 6AWG/16mm² Wire Seal Note: Use AT60-204-08141-16 contacts for 6AWG/16mm² applications | Size 8, 60A Size 12, 25A Size 16, 13A | 250V |

DuraMate™ AHDM/AHDBM ISOBUS 91 Series - Backshell Options and Accessories

| Image | Part Number | Description |
|---|----------------|--|
|  | AHDMBS-24-002 | Size 24, Backshell, 2 PC, DuraMate™ AHDM/AHDBM ISOBUS 91 Series |
|  | AHDMBS-24-001 | Size 24, Backshell, Tie Wrap, End Bell, DuraMate™ AHDM/AHDBM ISOBUS 91 Series |
|  | AHDMBS-24-059 | Size 24, Backshell, w Cable Clamp, DuraMate™ AHDM/AHDBM ISOBUS 91 Series |
|  | AHDMBS-24-SM01 | Size 24, Backshell, Metal, DuraMate™ AHDM/AHDBM ISOBUS 91 Series |
|  | AHDM-BS-24NUT | Size 24, Adapter for use with: AHDPBS-010-2405 AHDP Backshell, Conduit, Snap-Over, Straight 180 AHDPBS-011-2405 AHDP Backshell, Conduit, Snap-Over, Right Angle 90 |
|  | AHDC34-24 | Size 24, Protective Cap for Plug, DuraMate™ AHDM/AHDBM ISOBUS 91 Series |
|  | AHDC36-24 | Size 24, Protective Cap for Receptacle, DuraMate™ AHDM/AHDBM ISOBUS 91 Series |
|  | A112264 | Size 24, Lockwasher, DuraMate™ AHDM/AHDBM ISOBUS 91 Series |
|  | A112263-90 | Size 24, Nut, DuraMate™ AHDM/AHDBM ISOBUS 91 Series |
|  | A114018 | Size 8, Blank Seal Plug |
|  | A114017 | Size 12/16, Blank Seal Plug |
|  | AT13-217-1605 | Size 16, Locking Seal Plug |
|  | AT11-310-1605 | Size 16, Contact Removal Tool, Light Blue, 16-20AWG |

DuraMate™ AHDM/AHDBM ISOBUS 91 Series - Backshell Options and Accessories, cont.

| Image | Part Number | Description |
|---|-------------------|---|
|  | AT11-337-1205 | Size 12 , Contact Removal Tool, Orange, 12-14AWG |
|  | AT11-001-3.6M | Size 8, Contact Removal Tool, Black, 7-10AWG |
|  | AT114008 | Size 8, Contact Removal Tool, Green, 8-10AWG |
|  | AT60-204-08141-16 | Size 8, 6AWG/16mm ² Wire Range, Contact, Pin, Nickel-plated Note: Refer to Plug/Receptacle datasheets for a complete list of available contacts |
|  | AT62-203-08141-16 | Size 8, 6AWG/16mm ² Wire Range, Contact, Socket, Nickel-plated Note: Refer to Plug/Receptacle datasheets for a complete list of available contacts |